



Hangerbolt, Vertical

AXE_AL_BR_HB_V

Durable

Non-corrosive materials for the toughest environmental conditions. Strength and integrity testing done.

Innovative

Adjustable positioning for integration with mounting solutions. Custom J-bolt can be supplied for steel purlins.


Versatile

Attach to a wide variety of wooden and steel purlins. Fixation of rails or railed angled system.

Effortless

Convenient installation with accessible fasteners for saving installation time.


Dimensions


L 200mm * W 40mm *
H 38mm
236g

Integration with rail



Integration with angled frame railed

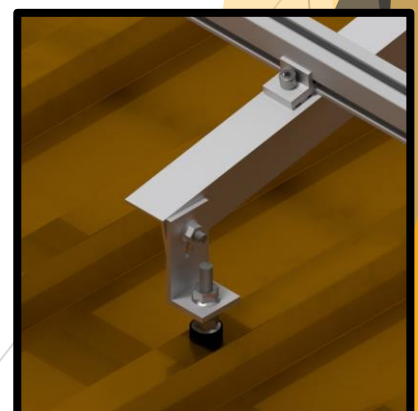

| | |
|----------------------|--|
| Application | Roof Top – Rails Roof Top – Angled Frames (Railed) |
| Roof types | Corrugated, IBR, Asbestos. Wood and metal purlin. Consult for other roof manufacturers |
| Test protocol | Structural analysis to obtain reaction forces for each possible scenario. Pull tests on clamped bracket FEM analysis on part under load |
| Materials | <u>Fasteners:</u> Stainless Steel (A2) “Available in Stainless steel (A4)” <u>Body:</u> L- Bracket: Extruded aluminium (6063 T6) “Anodising available in 25µm layer” M10 x 200 threaded rod, Stainless Steel <u>Weatherproof gasket:</u> SVA45 Expanded EVA foam |
| Certification | ISO 9001 |
| Warranty | 10 years ¹ |

¹ For terms and conditions please refer to the Axe Struct Warranty Terms.