

Tile Hook Bracket, Vertical Eco

AXE_GS/SS_BR_TH_V_E

Durable

Hot dipped galvanised to ensure lasting results. Also available in stainless steel for coastal and aggressive environments

Effortless

Multiple hole positions for any purlin layout. Furthermore, the protruding arm can be horizontally moved for all tile types.

Versatile

Vertically adjustable under tile to accommodate a wide variety of tile types. Available in different protruding arm lengths.

Economical

Cost competitive, functional design. Easy to assemble, reducing installation time.


Dimensions



L 225mm * W 150mm *
H 164mm
749g

| | |
|----------------------|--|
| Application | Roof Top – Flush Railed |
| Roof types | Tile roofs |
| Adjustment | <p><u>Under Tile:</u> Vertical adjustment for a wide variety of tiles and purlin positioning. Horizontal hole positioning for various tile shapes.</p> <p><u>Above Tile:</u> Horizontal and Vertical adjustment for irregular roofs.</p> <p><u>Protrude:</u> Extend 140mm from the fixing point to match with various tiles.</p> |
| Materials | <p><u>Fasteners:</u> Stainless Steel 304</p> <p><u>Body:</u> Hot Dip Galvanised Steel Stainless Steel 304</p> <p><u>Protection washers:</u> Fibre (if bracket is of HDG)</p> |
| Certification | ISO 9001 |
| Warranty | 10 years ¹ |

Integration with Railed system connection

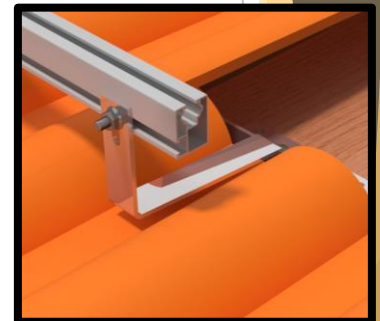

A: 42 – 52 mm, B: 140 mm

