

## Tile Hook Bracket, Vertical Sweep

AXE\_GS/SS\_BR\_TH\_V\_S

### Durable

Hot dipped galvanised to ensure lasting results. Also available in stainless steel for coastal and aggressive environments.

### Effortless

Multiple hole positions for any purlin layout. Furthermore, the protruding arm can be horizontally moved for all tile types.


### Versatile

Vertically adjustable under tile to accommodate a wide variety of tile types. Available in different protruding arm lengths.

### Trust

Rail is positioned above wood screws. In turn lower moment forces are applied to screws, leaving you with lasting connections.


### Dimensions



L 225mm \* W 150mm \*  
H 173mm  
900g

<b>Application</b>	Roof Top – Flush Railed
<b>Roof types</b>	Tile roofs
<b>Adjustment</b>	<p><u>Under Tile:</u> Vertical adjustment for a wide variety of tiles and purlin positioning. Horizontal hole positioning for various tile shapes.</p> <p><u>Above Tile:</u> Vertical adjustment for irregular roofs.</p> <p><u>Protrude:</u> Extend 140mm from the fixing point to match with various tiles.</p>
<b>Materials</b>	<p><u>Fasteners:</u> Stainless Steel 304</p> <p><u>Body:</u> Hot Dip Galvanised Steel Stainless Steel 304</p> <p><u>Protection washers:</u> Fibre (if bracket is of HDG)</p>
<b>Certification</b>	ISO 9001
<b>Warranty</b>	10 years <sup>1</sup>

### Integration with Railed system connection

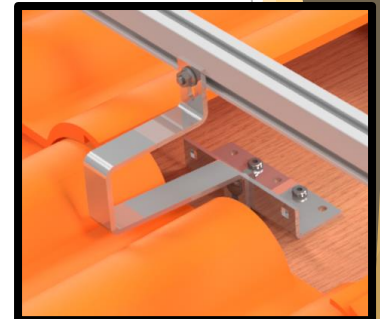

A: 42 – 52 mm, B: 140 mm  
C: 60 mm

